

Features

- Easy installation Pre-Assembled, Pre-plumbed
- Easy to remove and store for winter
- Durable and decorative Patented design
- Weather resistant
- New construction or Replacement
- Does not require paint, but can be painted
- Piping is concealed, but accessible from back
- Scald free mix valve

Materials

- Shell Assembly 3/4" PVC solid core composite
- Plumbing PEX w/Stainless cinch Ring
- Lead free Brass, Durapex plastic fittings
- Shell constructed with Miter Formed joinery
- Stainless steel flexible supply connections

Components


- Mix valve single handle, pressure balanced, ADA compliant
- Shower head 2.5 GPM, 5" dia.
- Foot wash 2.5 GPM, 5-3/4" extension
- Side Silcocks, 1/4 turn stainless steel, 3/4 Male Hose, Hot and Cold

Installation

- Connect Hot/Cold plumbing connections
- Hang unit on receiving Cleat (Provided)

Codes/Standards

- State and International Plumbing
- EPA Water sense

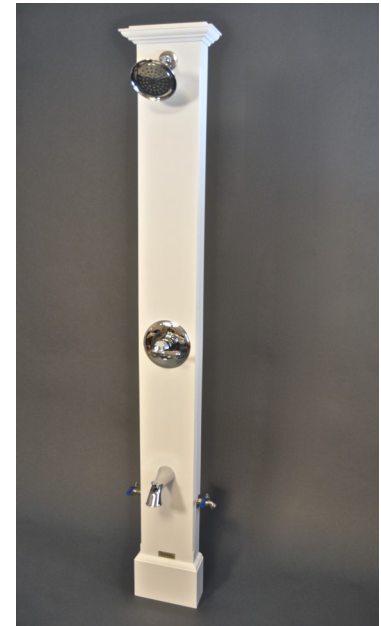

For complete listing, go to
WWW.NEOWSHOWERS.COM

Measurements

- 84" Tall, 10" Wide and 4" Deep
- 1/2" IPS Female "Flex Connections"
- Weight 32 lbs.

Patent No.: US D716,421 S